

SPA-18-26-40 Solid State Power Amplifier

(18GHz - 26.5GHz, 40W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluki SPA-18-26-40 is a solid-state RF power amplifier with an output frequency of 18GHz to 26.5GHz and an output power of 40W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


SPA-18-26-40			
Frequency Range	18GHz - 26.5GHz	Input Power	0dBm (max.)
Output Power	40W (min.)	Harmonic	-20dBc (typ.)
P3dB Output Power	20W (min.)	Background Noise	-40dBm/MHz (max.)
Gain	50dB (min.)	Spurious	-60dBc (max.)
Gain Flatness	± 5dB (max.)	Input VSWR	1.8:1 (typ.)
Adjustable Gain	15dB (max.)	Impedance	50 ohm

SPA-18-26-40 Solid State Power Amplifier

(18GHz - 26.5GHz, 40W)


Input Port	2.92mm (female)	Output Port	WR42
Communication Interface	RS485, LAN	Power Supply	AC 90-240V, 50/60Hz
Dimension	3U	Cooling Type	Air cooling
Operating Temperature	0 - 50°C		

Outline Structure

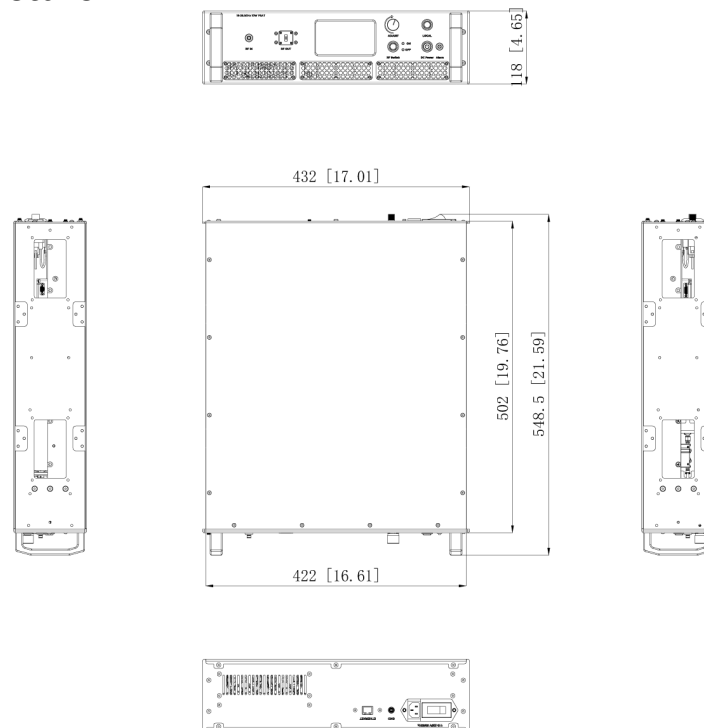

Options

Module No.	Item
001	Overdrive protection
002	GPIO interface

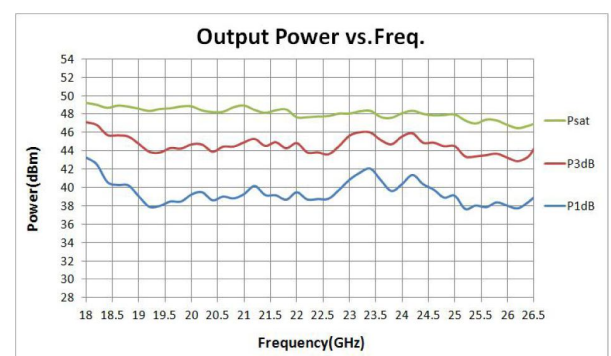

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.