

TNC/MALE-TNC/FEMALE REVERSE POLARITY 3 GHZ ATTENUATORS

SA3TR-XX

SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-3 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.25:1 MAX
 POWER: 2 WATT CW @ 25 DEG C
 POWER(PEAK): 100W FOR 25μSECONDS
 POWER COEFFICIENT: 0.001dB/W



ATTENUATION ACCURACY		
	DC-2 GHz	2-3 GHz
10 dB	± 0.2 dB	± 0.3 dB

MECHANICAL

MATERIALS BODY : BRASS
 BODY PLATING: TRI-METAL (TIN-ZINC-COPPER-ALLOY)
 MATERIALS CONTACT: PHOSPHER BRONZE

ROHS COMPLIANCE

MEASUREMENTS BELOW ARE TYPICAL

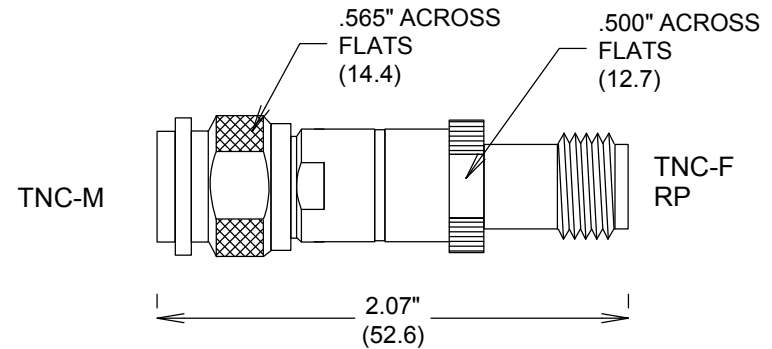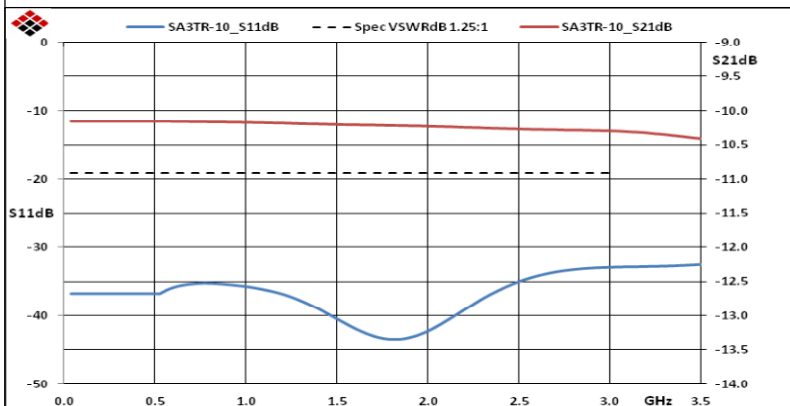

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TNC/MALE-TNC/FEMALE REVERSE
 POLARITY 3 GHZ ATTENUATORS

SIZE A	CAGE CODE 3FKR5	DWG NO SA3TR-XX	REV A
SCALE		SHEET	