

SA3SR-10 DATA SHEET

10 dB Fixed Attenuator SMA Reverse Polarity Male To SMA Reverse Polarity Female Up To 3 GHz Rated To 2 Watts With Brass Gold Body

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The SA3SR-10 is a 10 dB Fixed Attenuator that operates from DC to 3 GHz and is rated to 2 Watts. The versatile coaxial package uses reverse polarity SMA male to reverse polarity SMA female connectors and is also REACH and RoHS compliant.

Electrical Specifications

| Description | Min | Тур | Max | Units |
|---------------------|-----|-----|--------|-------|
| Frequency Range | DC | | 3 | GHz |
| Impedance | | 50 | | Ohms |
| Nominal Attenuation | | 10 | | dB |
| VSWR | | | 1.25:1 | |
| Input Power, CW | | | 2 | Watts |

Input Power, Peak 100 Watts for 25 µsec.

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|--------------------|---------|--------|----|----|----|-------|
| Range | DC to 2 | 2 to 3 | | | | GHz |
| VSWR, Max | 1.15:1 | 1.25:1 | | | | |
| Atten Accuracy, Ty | p ±0.2 | ±0.3 | | | | dB |
| | | | | | | |

Electrical Specification Notes:

Power coefficient of 0.001 dB/W (change in attenuation with increase in power)

Temperature coefficient of 0.001 dB/°C max., 0.0003 dB/°C typ.

Mechanical Specifications

Size
Length
Width/Diameter
Weight
Body Material and Plating

0.97 in [24.64 mm] 0.315 in [8 mm] 0.011 lbs [4.99 g] Brass, Gold

Configuration

Design Fixed



Features:

- DC to 3 GHz Frequency Range
- Attenuation 10±0.3 dB
- Max Power 2 Watts (CW)
- VSWR < 1.25:1

Applications:

- Instrumentation
- · Precision measurements
- Prototyping and characterization
- Production systems

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Package Style

Connectorized Module

Connectors

| Description | Connector 1 | Connector 2 | | | | |
|----------------------------|---------------------|---------------------------|--|--|--|--|
| Type SMA Male | | SMA Female | | | | |
| Polarity | Reverse Polarity | Reverse Polarity | | | | |
| Contact Material & Plating | Phosphor Bronze, Go | old Phosphor Bronze, Gold | | | | |
| Contact Plating Spec. | 4 μ-in min. | 4 μ-in min. | | | | |
| Dielectric Type | Teflon | Teflon | | | | |
| Hex Size | 5/16 inch | | | | | |
| Body Material & Plating | Brass, Gold | Brass, Gold | | | | |
| Body Plating Spec. | 4 μ-in min. | 4 μ-in min. | | | | |

Environmental Specifications

Temperature

Operating Range -50 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

10 dB Fixed Attenuator SMA Reverse Polarity Male To SMA Reverse Polarity Female Up To 3 GHz Rated To 2 Watts With Brass Gold Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 10 dB Fixed Attenuator SMA Reverse Polarity Male To SMA Reverse Polarity Female Up To 3 GHz Rated To 2 Watts With Brass Gold Body SA3SR-10

URL: https://www.fairviewmicrowave.com/10db-fixed-attenuator-sma-male-sma-female-2-watts-sa3sr-10-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 2.0 Page 2 of 3





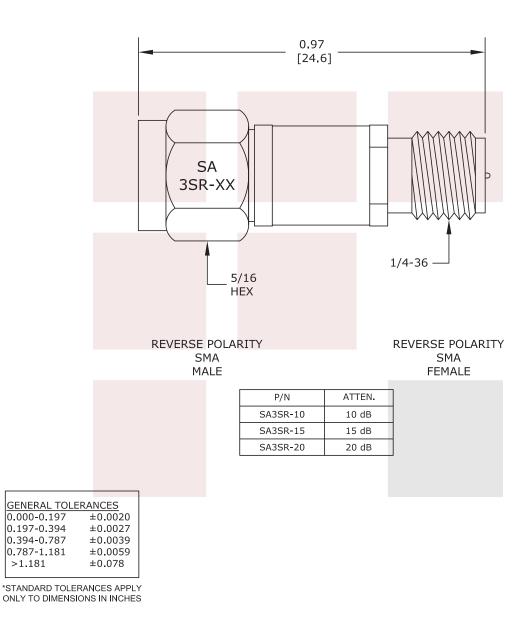

| | FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | | |
|-------------------|---|---|--------|-------|------|-------|--------|------|
| SMA Reverse Polar | .0 dB Fixed Attenuator SMA Reverse Polarity Male To | DWG NO SA3SR | | SA3SR | CAGE | | 3FKR5 | |
| | SMA Reverse Polarity Female Up To 3 GHz Rated To 2 Watts With Brass Gold Body | CAD FILE | 032216 | SHEET | SCAL | E N/A | SIZE A | 3045 |

>1.181