

**12 dB Fixed Attenuator SMA Male To SMA Female  
 From 0.009 MHz To 6 GHz Rated To 2 Watts With  
 Brass Body**

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock selections and ships them same day. The FMAT1014 is a 12 dB Fixed Attenuator that operates from 9 KHz to 6 GHz and is rated to 2 Watts. The versatile coaxial package uses SMA male to SMA female connectors and is also REACH and RoHS compliant.



**Features:**

- 9 kHz to 6 GHz Frequency Range
- Attenuation 12±0.5 dB
- Max Power 2 Watts (CW)
- Return Loss < -20 dB

**Applications:**

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	9KHz		6	GHz
Impedance		50		Ohms
Nominal Attenuation		12		dB
Attenuation Accuracy			±0.5	dB
VSWR		1.15:1	1.22:1	
Return Loss		-23	-20	dB
Input Power, CW			2	Watts

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Range	9KHz to 3	3 to 6				GHz
Atten Accuracy, Typ	±0.15	±0.25				dB
Atten Accuracy, Max	±0.3	±0.5				dB

**Mechanical Specifications**

<b>Size</b>	
Length	1.22 in [30.99 mm]
Width/Diameter	0.37 in [9.4 mm]
Weight	0.0238 lbs [10.8 g]
Body Material and Plating	Brass

**Configuration**

Design	Fixed
Package Style	Connectorized

Fairview Microwave  
 1130 Junction Dr. #100  
 Allen, TX 75013  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female
Hex Size	5/16 inch	

**Environmental Specifications**


**Compliance Certifications** (visit [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com) for current document)

RoHS Compliant Yes  
 REACH Compliant 12/17/2015

**Plotted and Other Data**

Notes:

**Typical Performance Data**

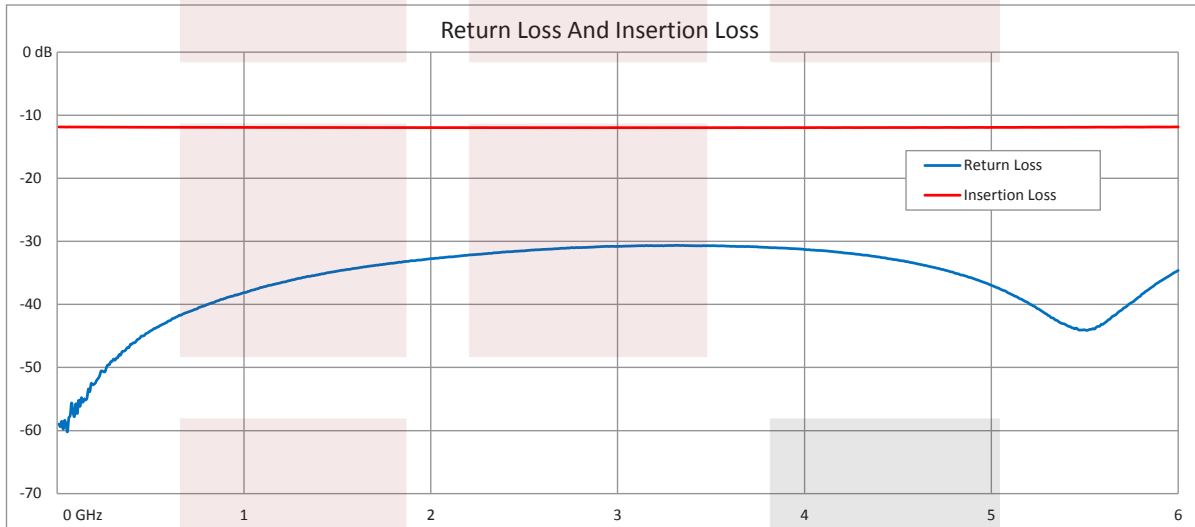


12 dB Fixed Attenuator SMA Male To SMA Female From 0.009 MHz To 6 GHz Rated To 2 Watts With Brass Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [12 dB Fixed Attenuator SMA Male To SMA Female From 0.009 MHz To 6 GHz Rated To 2 Watts With Brass Body FMAT1014](https://www.fairviewmicrowave.com/12db-fixed-attenuator-sma-male-sma-female-2-watts-fmat1014-p.aspx)

URL: <https://www.fairviewmicrowave.com/12db-fixed-attenuator-sma-male-sma-female-2-watts-fmat1014-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

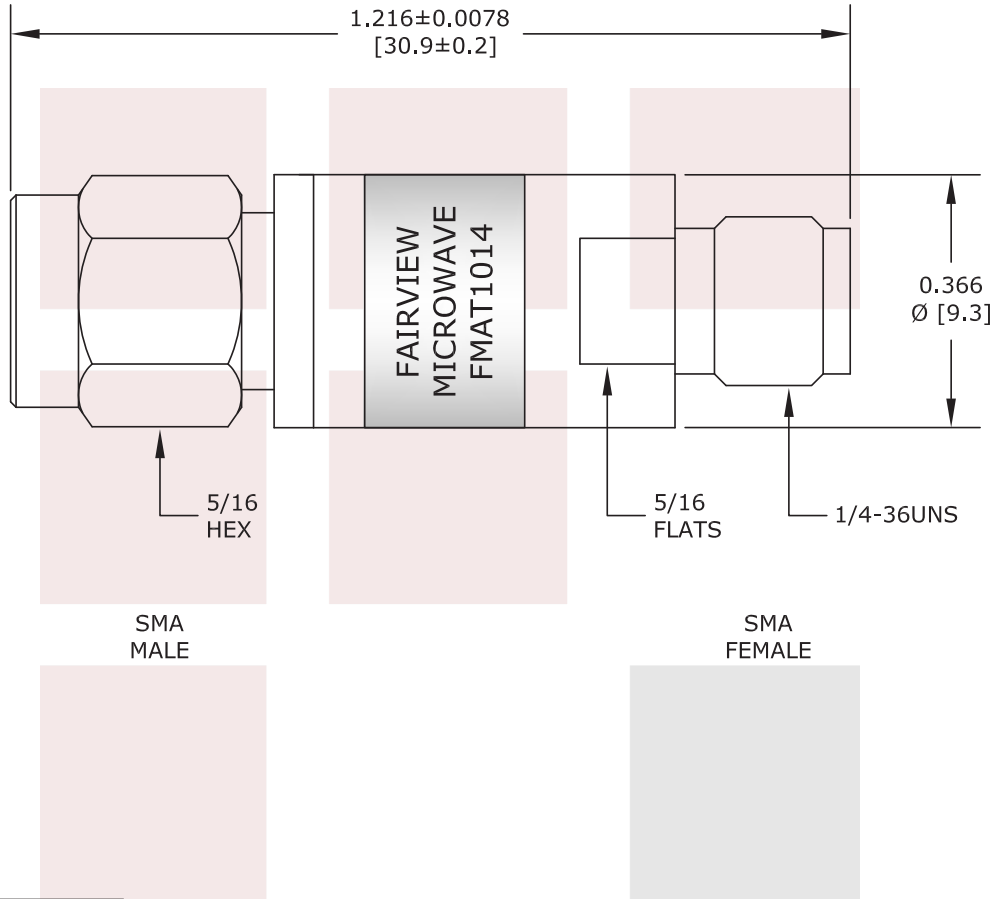

GENERAL TOLERANCES	
0.039-0.158	$\pm 0.0055$
0.158-0.630	$\pm 0.0059$
0.630-2.480	$\pm 0.0078$
>2.480	$\pm 0.0118$

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 12 dB Fixed Attenuator SMA Male To SMA Female From 0.009 MHz To 6 GHz Rated To 2 Watts With Brass Body		DWG NO <b>FMAT1014</b>		CAGE CODE <b>3FKR5</b>	
CAD FILE	030116	SHEET	SCALE	N/A	SIZE A 3045